







MODEL: YS20

(1)x1		(2)x5
		
Back & Seat W/ ARMS		Caster
(3)x1	**(4)x1**	**(5)x1**
		
Mechanism	Gas Lift W/ Cover	5-Star Base

Please unscrew all screws from the bottom of seat cushion before assembly.

(A)*4PCS		**M8*22**
(B)*6PCS		**M6*25**
(C)*4PCS		**ARM CAP**
(D)*1PC		**ALLEN KEY**

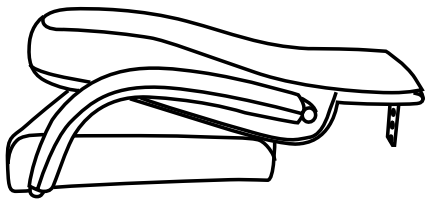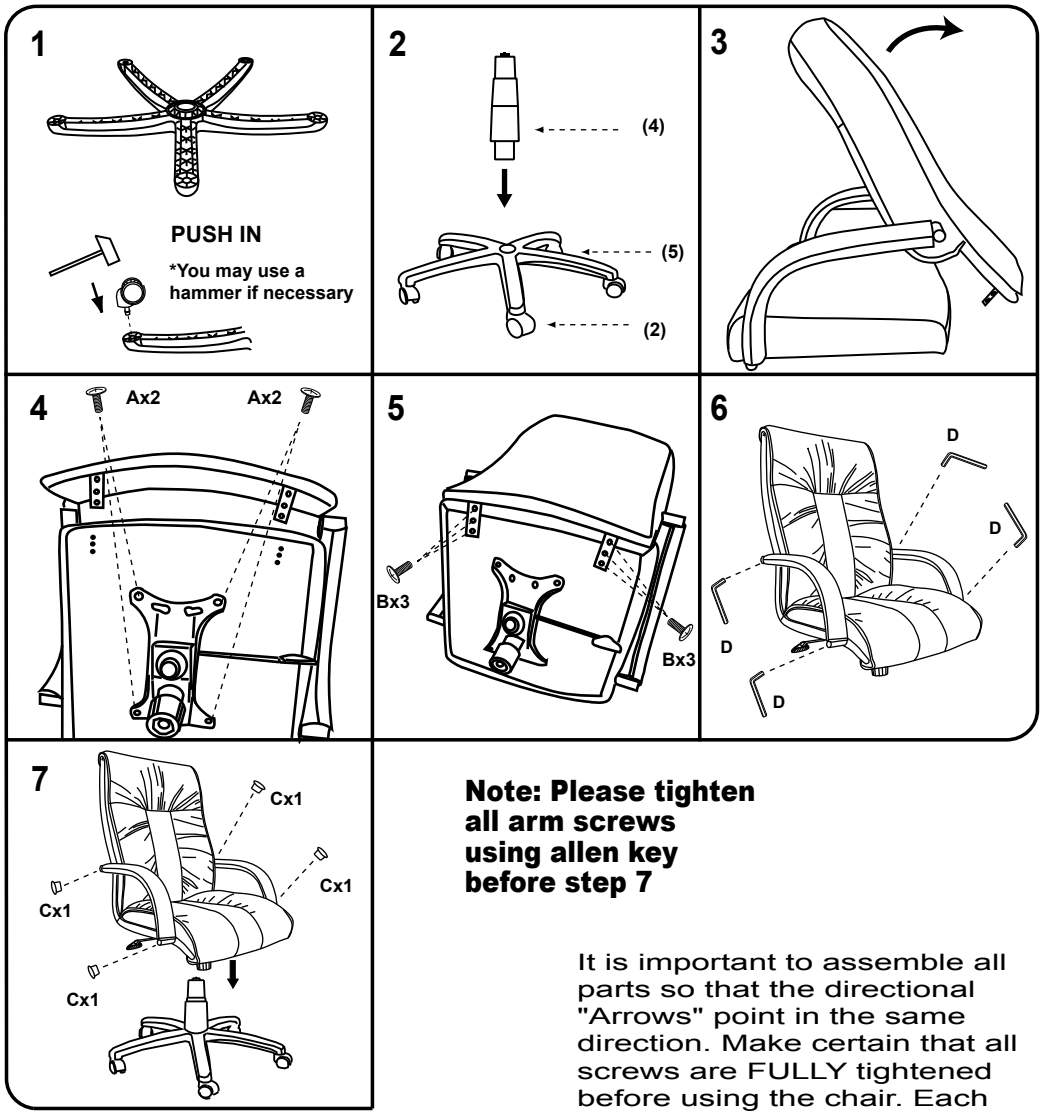

Note: Please tighten all arm screws using allen key before step 7

It is important to assemble all parts so that the directional "Arrows" point in the same direction. Make certain that all screws are FULLY tightened before using the chair. Each month, check all screws and tighten any that may have loosened.